

Climax[®]

Pneumatics



Cnomo NFE 49001 Cylinders

1-800-732-8704
Easley, South Carolina

Climax® Cnomo NFE 49001 Cylinders



End Caps	<i>Diecast Aluminum</i>
Tube	<i>Anodized Aluminum</i>
Tie Rods	<i>Zinc Coated or Stainless Steel</i>
Seals	<i>Polyurethane</i>
Piston Rod	<i>Chromium Coated Steel</i>

Working Pressure	<i>1 to 10 bar</i>
Temperature	<i>5°C to 80°C with dry air</i>
Working Fluid	<i>Filtered compressed air, lubricated or not</i>

Available Versions

Double Acting, Magnetic, Cushioned
Double Acting, Magnetic, Cushioned, Through Piston Rod



Standard Strokes

Ø mm	25	50	75	100	150	200	250	300
25	•	•	•	•	•	•	•	
32	•	•	•	•	•	•	•	
40	•	•	•	•	•	•	•	•
50	•	•	•	•	•	•	•	•
63	•	•	•	•	•	•	•	•
80		•	•	•	•	•	•	•
100			•	•	•	•	•	•

Non-Standard Strokes are readily available


Climax® Cnomo NFE 49001 Cylinders

How to Order Base Models

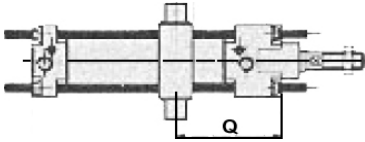
	PX	050	A	0	2	M	0100	B	A	C	TM200	1	2
Series	_____												
	PX – Cnomo NFE 49001 Cylinder												
Bore	_____												
	25 – 25 mm	080 – 80 mm											
	032 – 32 mm	100 – 100 mm											
	040 – 40 mm	125 – 125 mm											
	050 – 50 mm	160 – 160 mm											
	063 – 63 mm	200 – 200 mm											
Cushioning	_____												
	A – Adjustable Cushioning Standard												
Range	_____												
	0 – Single Rod 2 – Through Rod												
Magnet	_____												
	2 – Magnetic Piston Standard												
Piston Rod Ends	_____												
	M – Male												
Stroke	_____												
	025 – 25 mm												
	050 – 50 mm												
	075 – 75 mm												
	100 – 100 mm												
	150 – 150 mm												
	200 – 200 mm												
	250 – 250 mm												
	300 – 300 mm												
Piston Rod Material	_____												
	B – Chrome Plated Steel												
Tie Rod Material	_____												
	A – Black Oxide Coated												
Body Material	_____												
	C – Aluminum												
Side Trunnion	_____												
	Blank – No Trunnion TM*** – *** = "Q" Dimension (please specify)												
													
Port Position - Head	_____												
	1 – Position 1 2 – Position 2 3 – Position 3 4 – Position 4												
Port Position - Cap	_____												
													

Climax® Cnomo NFE 49001 Cylinders

Double Acting Single Rod

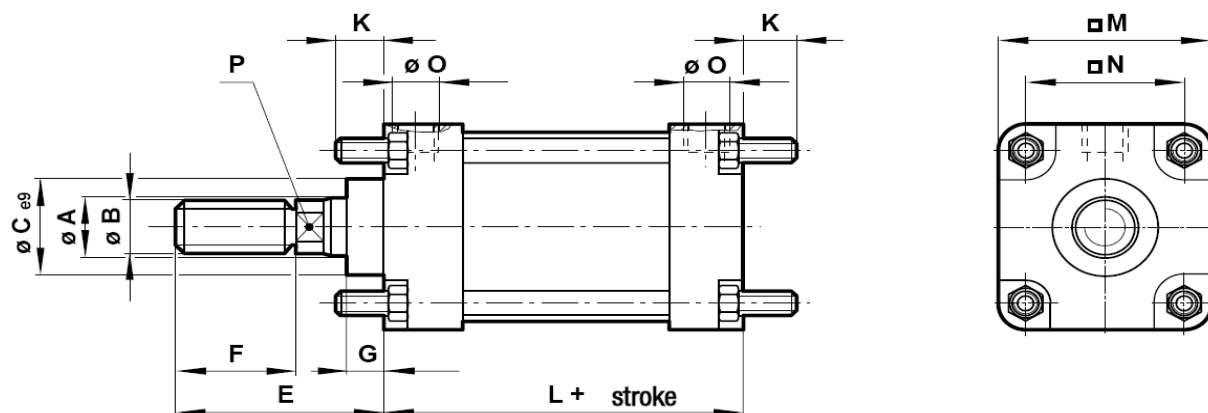

Double Acting Through Rod

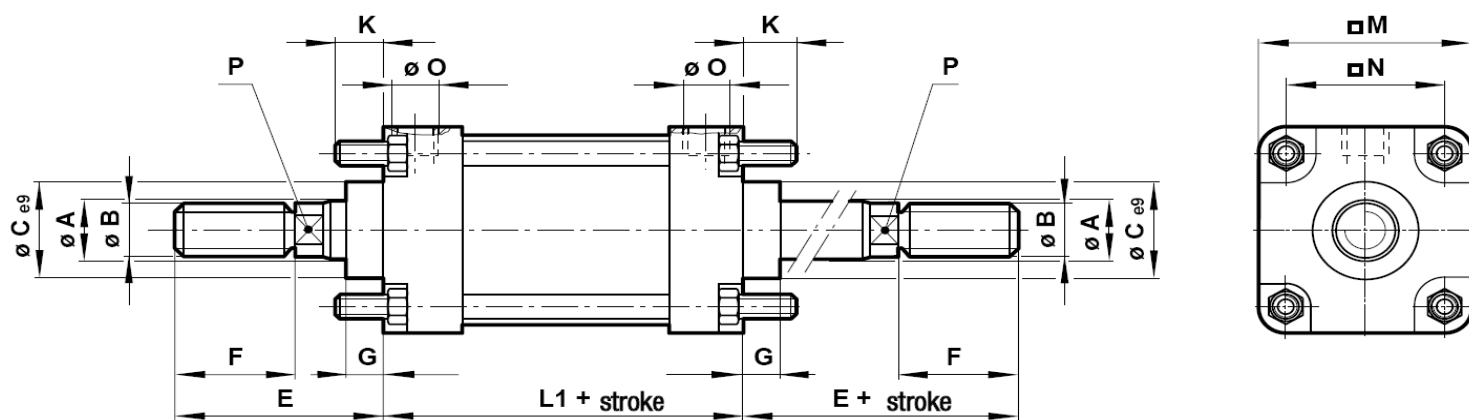


ømm	øA	øB	øCe9	E	F	G	K	L	L1	□M	□N	øO	P
32	12	M10x1.5	25	45	20	15	17	80	90	45	33	G1/8	8
40	18	M16x1.5	32	70	36	15	17	110	129	52	40	G1/4	13
50	18	M16x1.5	32	70	36	15	23	110	129	65	49	G1/4	13
63	22	M20x1.5	45	85	46	20	23	125	143	75	59	G3/8	17
80	22	M20x1.5	45	85	46	20	28	125	143	95	75	G3/8	17
100	30	M27x2	55	110	63	20	28	145	164	115	90	G1/2	22
125	30	M27x2	55	110	63	20	34	145	164	140	110	G1/2	22
160	40	M36x2	65	135	85	25	42	180	200	180	140	G3/4	32
200	40	M36x2	65	135	85	25	42	180	200	220	175	G3/4	32

Climax® Cnomo NFE 49001 Cylinders


Mounting Accessories for Cnomo Cylinders

Front or Rear Flange

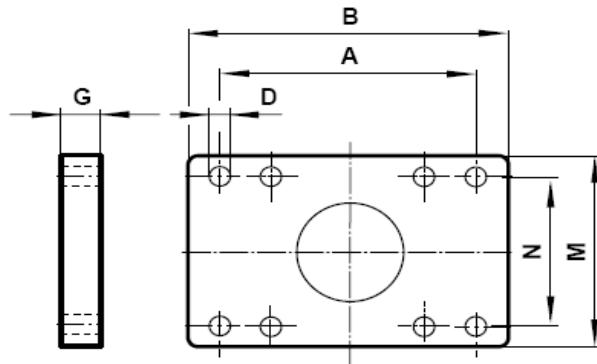

ømm	A	B	øD	G	M	N	Part Number
32	68	80	9	8	45	33	PL-032
40	78	90	9	8	52	40	PL-040
50	94	110	11	10	65	49	PL-050
63	104	120	11	10	75	59	PL-063
80	130	150	14	12	95	75	PL-080
100	150	170	14	12	115	90	PL-100
125	180	205	18	16	140	110	PL-125
160	228	260	22	20	180	140	PL-160
200	268	300	22	20	220	175	PL-200

Front or Rear Clevis

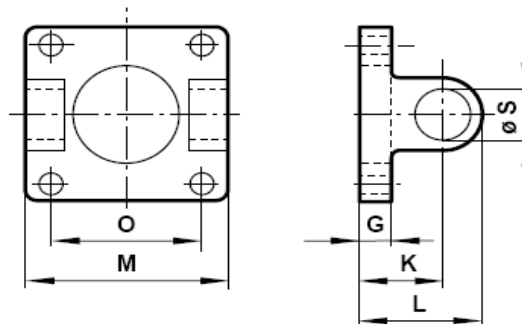


ømm	G	K	L	M	O	øS	Part Number
32	8	18	26	45	26	8	AF-032
40	8	24	36	52	33	12	AF-040
50	10	26	38	65	33	12	AF-050
63	10	30	46	75	47	16	AF-063
80	12	32	48	95	47	16	AF-080
100	12	37	57	115	57	20	AF-100
125	16	41	61	140	57	20	AF-125
160	20	55	80	180	72	25	AF-160
200	20	55	80	220	72	25	AF-200

Climax® Cnomo NFE 49001 Cylinders


Mounting Accessories for Cnomo Cylinders

Female Rod Clevis

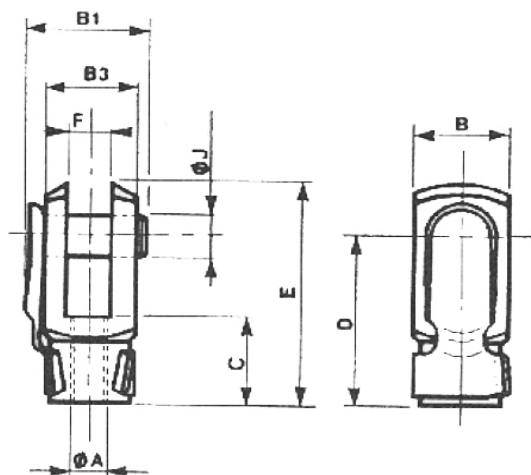

ømm	øA	B	B1	B3	C	D	E	F	J	Part Number
32	M10x1.5	22	28	22	20	36	45	11	8	FE10x150
40	M16x1.5	26	44	36	26	51	64	18	12	FE16x150
50	M16x1.5	26	44	36	26	51	64	18	12	FE16x150
63	M20x1.5	34	53	45	30	63	80	22	16	FE20x150
80	M20x1.5	34	53	45	30	63	80	22	16	FE20x150
100	M27x2.0	42	73	63	45	85	105	30	20	FE27x200
125	M27x2.0	42	73	63	45	85	105	30	20	FE27x200
160	M36x2.0	50	95	80	75	115	140	40	25	FE36x200
200	M36x2.0	50	95	80	75	115	140	40	25	FE36x200

Male Rod Clevis

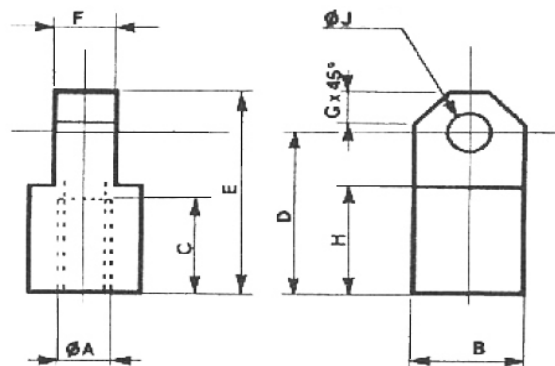


ømm	øA	B	C	D	E	F	G	H	J	Part Number
32	M10x1.5	22	20	36	45	11	6	25	8	MA10x150
40	M16x1.5	26	26	51	64	18	10	34	12	MA16x150
50	M16x1.5	26	26	51	64	18	10	34	12	MA16x150
63	M20x1.5	34	30	63	80	22	12	41	16	MA20x150
80	M20x1.5	34	30	63	80	22	12	41	16	MA20x150
100	M27x2.0	42	45	85	105	30	17.5	58	20	MA27x200
125	M27x2.0	42	45	85	105	30	17.5	58	20	MA27x200
160	M36x2.0	50	75	115	140	40	20	81	25	MA36x200
200	M36x2.0	50	75	115	140	40	20	81	25	MA36x200

Climax® Cnomo NFE 49001 Cylinders


Mounting Accessories for Cnomo Cylinders

Foot - Low

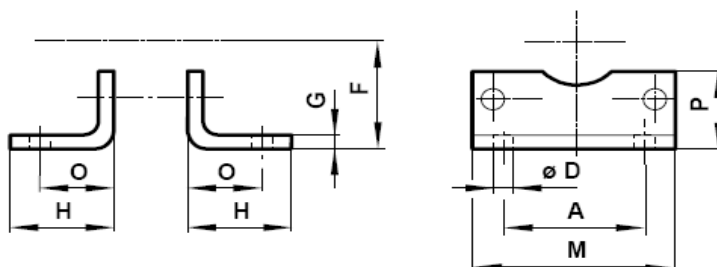

ømm	A	øD	F	G	H	M	O	P	Part Number
32	28	9	32	4	37	45	27	29	EBN-032
40	36	9	36	4	37	52	27	32	EBN-040
50	45	11	45	6	45	65	35	36	EBN-050
63	55	11	50	6	45	75	35	37	EBN-063
80	70	14	63	8	57	95	43	46	EBN-080
100	90	14	73	8	58	115	43	52	EBN-100
125	100	18	91	8	71	140	52	67	EBN-125
160	130	22	115	10	83	180	62	74	EBN-160
200	170	22	135	10	83	220	62	78	EBN-200

Foot - High

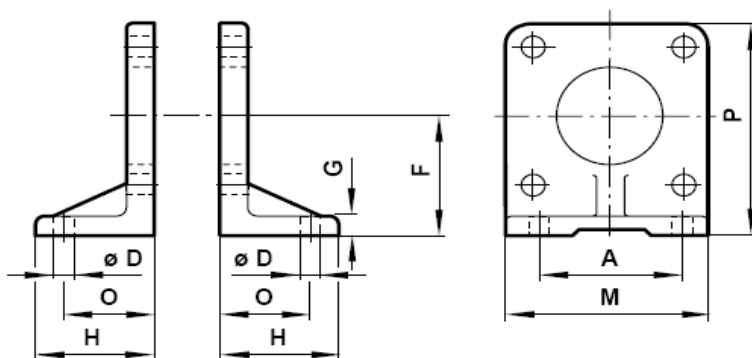


ømm	A	øD	F	G	H	M	O	P	Part Number
32	28	9	32	9	36	47	27	55.5	EN-032
40	36	9	36	9	36	52	27	62	EN-040
50	45	11	45	10	45	65	35	77	EN-050
63	55	11	50	10	45	75	35	87	EN-063
80	70	14	53	12	55	95	43	110	EN-080
100	90	14	73	12	55	115	43	130	EN-100
125	100	18	91	16	68	140	52	161	EN-125
160	130	22	115	20	80	180	62	205	EN-160
200	170	22	135	20	80	220	62	245	EN-200

Climax® Cnomo NFE 49001 Cylinders


Mounting Accessories for Cnomo Cylinders

Wide Foot - Low

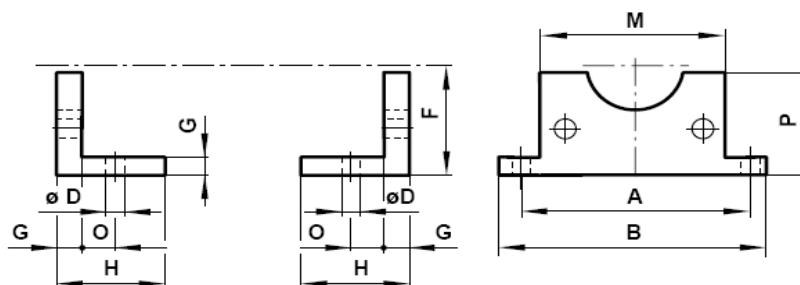

ømm	A	B	øD	F	G	H	M	O	P	Part Number
32	65	82	9	32	5	35	45	10	35	EBL-032
40	72	90	9	36	5	35	52	10	35	EBL-040
50	90	110	11	45	6	45	65	12	45	EBL-050
63	100	125	11	50	6	45	75	12	45	EBL-063
80	126	155	14	63	7	60	95	16	40	EBL-080
100	148	180	14	73	7	60	115	16	40	EBL-100
125	180	215	18	91	8	70	140	16	50	EBL-125
160	230	275	22	115	10	80	180	20	80	EBL-160
200	270	315	22	135	10	80	220	20	80	EBL-200

Wide Foot - High

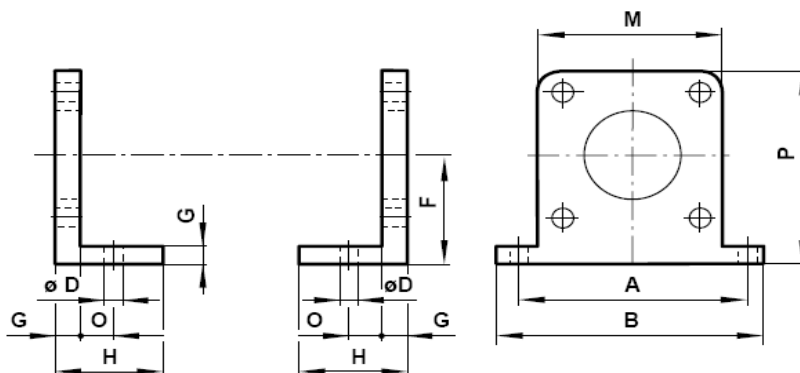


ømm	A	B	øD	F	G	H	M	O	P	Part Number
32	65	82	9	32	8	35	45	10	54	EL-032
40	72	90	9	36	8	35	52	10	62	EL-040
50	90	110	11	45	10	45	65	12	77	EL-050
63	100	120	11	50	10	45	75	12	87	EL-063
80	126	155	14	63	12	55	95	16	110	EL-080
100	148	180	14	73	12	55	115	16	130	EL-100
125	180	215	18	91	16	68	140	16	161	EL-125
160	230	275	22	115	20	80	180	20	205	EL-160
200	270	315	22	135	20	80	220	20	245	EL-200

Climax® Cnomo NFE 49001 Cylinders


Mounting Accessories for Cnomo Cylinders

Trunnion

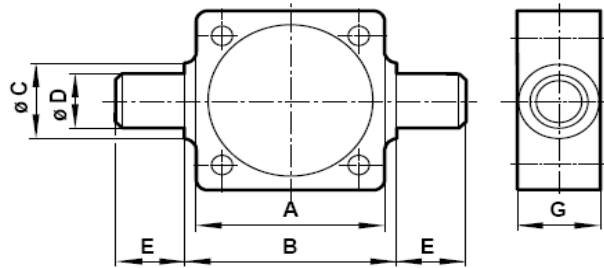

ømm	A	B	C	D	E	G	Part Number
32	46	50	20	12	12	22	TM-032
40	58	63	25	16	16	30	TM-040
50	68	73	25	16	16	30	TM-050
63	84	90	30	20	20	35	TM-063
80	102	108	30	20	20	35	TM-080
100	124	121	36	25	25	40	TM-100
125	152	159	36	25	25	40	TM-125
160	190	198	45	32	32	50	TM-160
200	240	284	45	32	32	50	TM-200

Adjustable Trunnion

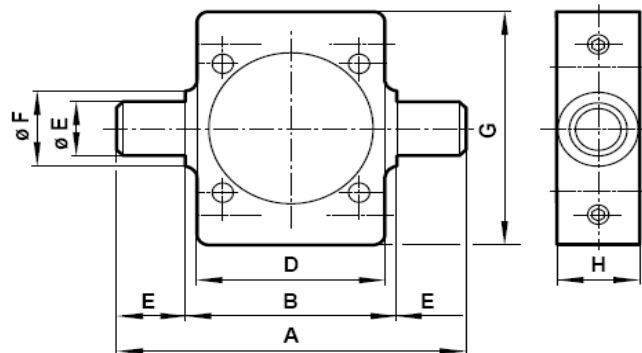


ømm	A	B	C	D	E	F	G	H	Part Number
32	74	50	12	46	12	20	60	22	TMA-032
40	95	63	16	68	16	25	68	30	TMA-040
50	105	73	16	68	16	25	82	30	TMA-050
63	130	90	20	84	20	30	95	35	TMA-063
80	148	108	20	102	20	30	115	35	TMA-080

Climax® Cnomo NFE 49001 Cylinders


Mounting Accessories for Cnomo Cylinders

Rear Straight Hinge

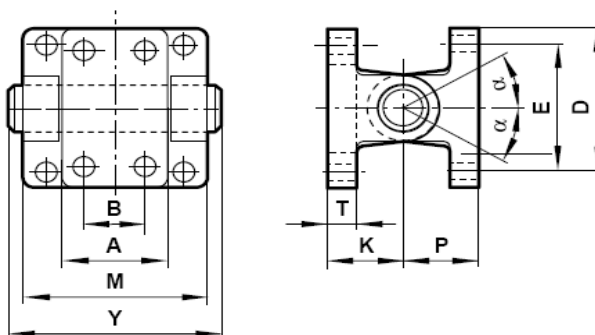

ømm	A	B	D	E	øF	K	M	P	øS	T	Y	A	Part Number
32	25		40	28	7	18	45	18	8	8	52	30°	AFM-032
40	32	16	52	38	9	24	52	26	12	10	60	25°	AFM-040
50	32	16	52	38	9	26	65	26	12	10	72.5	30°	AFM-050
63	46	25	75	54	11	30	75	34	16	12	84.4	30°	AFM-063
80	46	25	75	54	11	32	95	34	16	12	105	30°	AFM-080
100	56	32	115	90	14	37	115	41	20	16	125	30°	AFM-100
125	56	32	115	90	14	41	140	41	20	16	150	30°	AFM-125
160	71	43	180	150	18	55	180	55	25	20	190	30°	AFM-160
200	71	43	180	150	18	55	220	55	25	20	230	30°	AFM-200

Rear Hinge


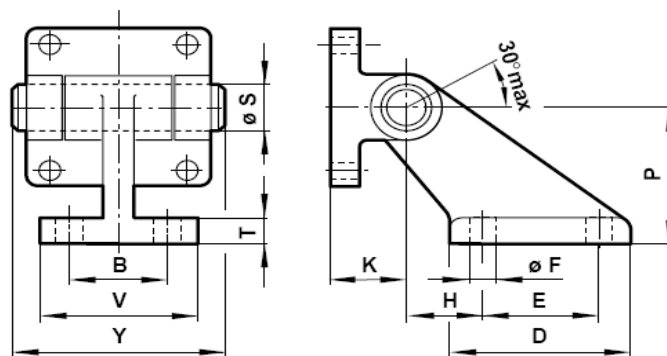


ømm	B	D	E	F	H	K	P	S	T	V	Y	Part Number
32	25	37	20	7	18	18	32	8	8	41	52	AFME-032
40	32	54	32	9	25	24	45	12	10	52	60	AFME-040
50	32	54	32	9	25	26	45	12	10	52	72.5	AFME-050
63	40	75	50	11	32	30	63	16	12	63	54.5	AFME-063
80	40	75	50	11	32	32	63	16	12	63	105	AFME-080
100	50	103	70	14	40	37	90	20	16	80	125	AFME-100
125	50	103	70	14	40	41	90	20	16	80	150	AFME-125
160	63	154	110	18	50	55	140	25	20	103	190	AFME-160
200	63	154	110	18	50	55	140	25	20	103	230	AFME-200

Climax® Cnomo NFE 49001 Cylinders

Position Sensing for Cnomo Cylinders

UL-21 Series

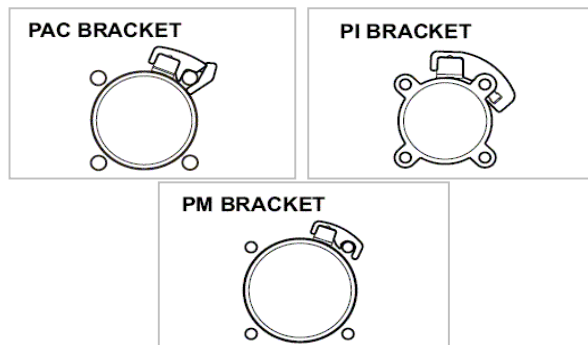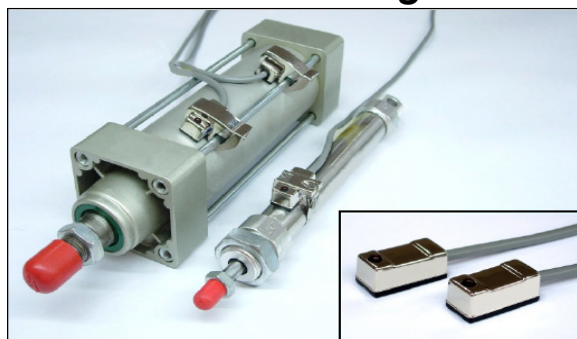

Specifications



CHARACTERISTIC/TYPE	UL-21R	UL-21N	UL-21P
Switching Logic	SPST Normally Open	Solid State Output, Normally Open	
Sensor Type	Reed Switch	NPN Current Sinking	PNP Current Sourcing
Operating Voltage (Note 1)	5 ~ 240V DC/AC	5 ~ 28V DC	
Switching Current	100 mA max.	200 mA max.	
Switching Rating	10 W max.	6 W max.	
Current Consumption		15 mA max. @ 24V (Switch Active)	16 mA max. @ 24V (Switch Active)
Voltage Drop	2.5 V max. @ 40mA DC	1.5 V max. @ 200 mA (Resistive Load)	
Leakage Current		0.01 mA max.	
Indicator	Red LED	Red LED	Green LED
Cable	4.0 ϕ, 2C, OIL RESISTANT PVC	4.0 ϕ, 3C, OIL RESISTANT PVC	
Sensitivity (Note 2)	70 Gauss	60 Gauss	
Max. Switching Frequency	200 Hz	1000 Hz	
Temperature Range	-10 ~ 70		
Shock (Note 3)	30 G	50 G	
Vibration (Note 4)	9G		
Enclosure Classification	IP 67 (NEMA 6)		
Protection Circuit		Power Source Reverse Polarity; Surge Suppression; O/P Short Circuit Protect	
Wiring Diagram			
UL-21R-03 UL-21R-QC8 UL-21N(P)-03 UL-21N(P)-QC8 M8 Quick Connector (IEC61076-2-101) 2 wire QC wiring 3 wire QC wiring			

- NOTE: 1. The max. Operating voltage of UL-21R-QC8 is 60V AC/DC (based on IEC61076-2-101).
 2. Measuring standard target: 15.5 * 8 * 5t (Anisotropic Rubber Magnet).
 3. Sin Wave /X - -Y- -Z 3 Directions / 3 Times Each Direction/ 11mS Each Time
 4. Double Amplitude 1.5mm / 10Hz ~55Hz~10Hz (Sweep 1 min) /X - -Y- -Z 3 Directions / 1 Hour each Time




Climax® Cnomo NFE 49001 Cylinders

Mounting Brackets for Cnomo Cylinders





PAC BRACKET

	PAC	MATERIAL: ZINC DIE-CAST	
			
APPLY TO 32 ¢ TO 125 ¢ TIE-ROD CYLINDER (BORE SIZE FROM 5 ¢ TO 12 ¢)			

PM BRACKET

	PM - 6	PM - 8	PM - 10	PM - 12	PM - 16
					

PI BRACKET

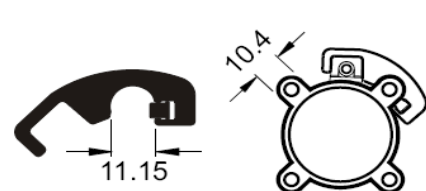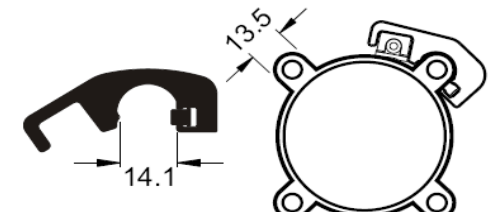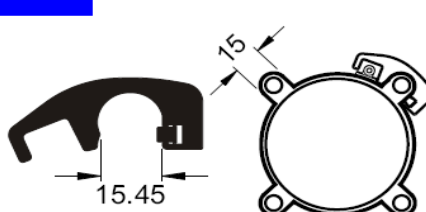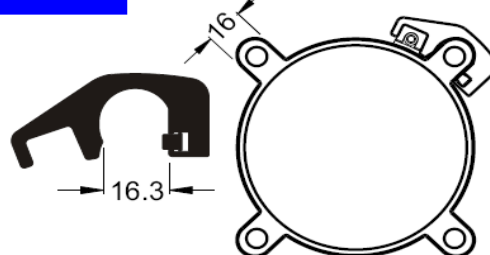	PI-1		PI-2	
	Apply to 32 ¢ to 40 ¢		Apply to 50 ¢ to 63 ¢	
	PI-3		PI-4	
	Apply to 80 ¢		Apply to 100 ¢	