

Climax[®] Pneumatics



Pneumatic Valves

Product Catalog

TECHNICAL PRODUCT CATALOG

CBE/CBE12

ISO 5599/1 Valve

- Compliance with ISO 5599/1 international standards
- Full range: 1 - 2 - 3 - 4 size
- Two different internal commutation system: mixed and spool, appreciated for decades thanks to their maximum reliability
- High capacity
- Short internal stroke
- No lubrication
- Electric connection M12 for 1 - 2 - 3 size
- Modular base
- Possibility of mounting different sizes on the same sub-base



TECHNICAL CHARACTERISTICS

Ambient temperature	-10 ÷ +50 °C			
Fluid temperature	max +50 °C			
Fluid	mixed system: not dehumidified filtered air 50 µm spool system: filtered air 50 µm, dehumidified or not			
Commutation system	mixed system, spool system			
Ways/Positions	5/2, 5/3			
Pressure	10 bar max			
Control	indirect electro - pneumatic, pneumatic			
Return	mixed system: pneumomechanical spring spool system: mechanical spring			
Connections	ISO 5599/1 interface			
	size 1	size 2	size 3	size 4
Nominal Ø (mm)	8	10	15	19
Nominal flow rate (NI/min)	1480	2300	4200	6600

CONSTRUCTIVE CHARACTERISTICS


Valve body	acetalic resin
Cover	zamak - aluminium
Seals	mixed system: nitrile rubber and polyurethane spool system: nitrile rubber
Sub-base	zamak - aluminium
Actuators	technopolymer
Spool	aluminium

ELECTRIC CHARACTERISTICS


Electropilot	AA CNOMO (U1) series
Coil	U3 DC series
Power consumption	2,5 W (DC) - 5 VA (AC)
Voltage	12 V DC - 24 V DC - 24 V AC - 110 V AC - 230 V AC
Connector	AM 5111
Manual override	with two position screw (standard) with button with tool (upon request)

Flow rate characteristics


>> ISO 1




>> ISO 2



>> ISO 3



>> ISO 4



P = Working pressure
PA = Supply pressure
Qn = Nominal flow rate

2

Standardized valves

Pneumatic Valves


CBE ISO 5599/1 Standard

Climax®

CBE12

ISO 5599/1 Standard

The ISO standard for pneumatic valves is accepted by industry and by the majority of major pneumatic valve manufacturers throughout the world. The choice of valves according to ISO standard means to be at the technical forefront and to guarantee the user the interchangeability of both the valve body and the electromagnetic part

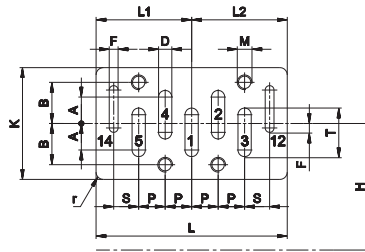


	A	B	D	F	H	K	L	L1	L2	M	P	r	S	T
ISO 1	9	14	4,5	3	43	38	65	32,5	32,5	M5	9	2,5	8,5	16,5
ISO 2	10	19	7	3	56	50	81	40,5	40,5	M6	12	3	10	22
ISO 3	11,5	24	10	4	71	64	106	53	53	M8	16	4	13	29
ISO 4	14,5	29	13	4	82	74	142	77,5	64,5	M8	20	4	15,5	36,5


Standard manual overrides

Functioning	Suitable for valve	Symbol/Part no.
1 = with 2 position screw	BE	⊖
2 = with button with tool	BE	→
3 = with embedded button, 1 position	BE12	→


Special versions available (upon request): with 1 - 2 position button, with 1 position frontal button, with 1 position button



1



2




3

Pneumatic Valves



CBE ISO 5599/1 Valves

Climax®
Pneumatics


Single/double **pneumatic** impulse



	ISO 1	ISO 2	ISO 3	ISO 4
A	128	145	191	222
B	47	47	63	63
C	39	52	64	74
D	5	5	10	10
E	36	48	64	80
F	28	38	48	58
G	18	24	32	40
H	M5x38	M6x35	M8x50	M8x50

Symbol	Control	Return	Pressure bar	Times (ms)		Size	Weight Kg	Part no.
MIXED SYSTEM								
	pneumatic amplifi ed	pneumomechanical spring	2÷10	9	18	1	0,30	CBE-3100
			2,3÷10	11	14	2	0,40	CBE-4100
			2,5÷10	19	49	3	0,65	CBE-5100
			3÷10	23	46	4	0,87	CBE-6100
	pneumatic amplifi ed	pneumatic amplifi ed	1÷10	5	5	1	0,30	CBE-3150
			1÷10	6	6	2	0,40	CBE-4150
			1÷10	10	10	3	0,65	CBE-5150
			1,3÷10	12	12	4	0,87	CBE-6150
	pneumatic amplifi ed	pneumatic not amplifi ed	2÷10	5	16	1	0,30	CBE-3170
			2÷10	6	13	2	0,40	CBE-4170
			2,2÷10	10	35	3	0,65	CBE-5170
			2,2÷10	12	32	4	0,87	CBE-6170
SPOOL SYSTEM								
	pneumatic amplifi ed	pneumomechanical spring	1,8÷10	11	22	1	0,30	CBE-3800
			2÷10	13	19	2	0,40	CBE-4800
			2,2÷10	21	52	3	0,65	CBE-5800
			2,8÷10	24	29	4	0,87	CBE-6800
	pneumatic amplifi ed	pneumatic amplifi ed	0,8÷10	6	6	1	0,30	CBE-3850
			1÷10	7	7	2	0,40	CBE-4850
			1÷10	12	12	3	0,65	CBE-5850
			1÷10	14	14	4	0,87	CBE-6850
	pneumatic amplifi ed	pneumatic not amplifi ed	1,5÷10	6	15	1	0,30	CBE-3870
			1,8÷10	7	14	2	0,40	CBE-4870
			2÷10	12	38	3	0,65	CBE-5870
			2÷10	14	31	4	0,87	CBE-6870

Single **electric** impulse

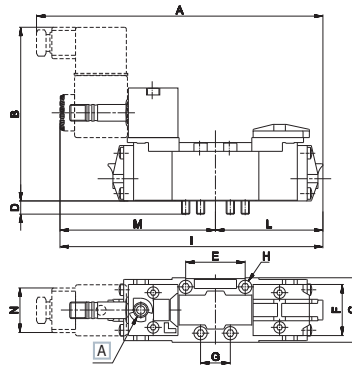

	ISO 1	ISO 2	ISO 3	ISO 4
A	169,5	195,5	219	253
B	105	105	118	118
C	39	52	64	74
D	5	5	10	10
E	36	48	64	80
F	28	38	48	58
G	18	24	32	40
H	M5x38	M6x35	M8x50	M8x50
I	159,5	176	208,5	235
L	64	72,5	95,5	111
M	95,5	103,5	113	124
N	30	30	30	30

[A] Manual override

Symbol	Control	Return	Pressure bar	Times (ms)		Size	Weight Kg	Part no.
				En.	De-en.			
MIXED SYSTEM								
	electric amplifi ed	pneumomechanical spring	2÷10	20	32	1	0,45	CBE-3000
			2,3÷10	24	25	2	0,55	CBE-4000
			2,5÷10	32	71	3	0,90	CBE-5000
			3÷10	38	62	4	1,12	CBE-6000
	electric amplifi ed	pneumatic amplifi ed	1÷10	16	7	1	0,45	CBE-3060
			1÷10	17	7	2	0,80	CBE-4060
			1÷10	23	15	3	1,30	CBE-5060
			1,3÷10	25	16	4	1,37	CBE-6060
SPOOL SYSTEM								
	electric amplifi ed	pneumomechanical spring	2÷10	21	35	1	0,45	CBE-3700
			2,2÷10	24	30	2	0,55	CBE-4700
			2,3÷10	33	74	3	0,90	CBE-5700
			2,8÷10	39	68	4	1,12	CBE-6700
	electric amplifi ed	pneumatic amplifi ed	1÷10	17	8	1	0,45	CBE-3760
			1÷10	18	9	2	0,80	CBE-4760
			1÷10	26	17	3	1,30	CBE-5760
			1,3÷10	27	18	4	1,37	CBE-6760

For manual version with button, add "U" to the end of the part number
Electrovalves are supplied without coil, connector and locking ring


2
Standardized valves

Pneumatic Valves

CBE ISO 5599/1 Valves

Climax®
Pneumatics

Double electric impulse

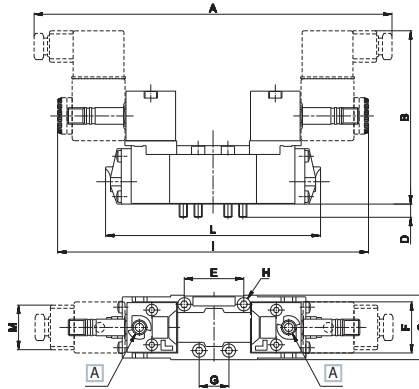

	ISO 1	ISO 2	ISO 3	ISO 4
A	211	226	247	268
B	105	105	118	118
C	39	52	64	74
D	5	5	10	10
E	36	48	64	80
F	28	38	48	58
G	18	24	32	40
H	M5x38	M6x35	M8x50	M8x50
I	191	207	226	248
L	128	145	191	222
M	30	30	30	30

A Manual override

Symbol	Control	Return	Pressure bar	Times (ms)		Size	Weight Kg	Part no.
MIXED SYSTEM								
	electric amplifi ed	electric amplifi ed	1÷10	16	16	1	0,55	CBE-3020
			1÷10	17	17	2	0,80	CBE-4020
			1÷10	23	23	3	1,20	CBE-5020
			1,3÷10	25	25	4	1,37	CBE-6020
	electric amplifi ed	electric non amplifi ed	2÷10	16	34	1	0,55	CBE-3030
			2÷10	17	29	2	0,80	CBE-4030
			2,2÷10	23	54	3	1,20	CBE-5030
			2,2÷10	25	45	4	1,37	CBE-6030
	electric amplifi ed	electric amplifi ed	3÷10	50	26	1	0,55	CBE-3200
			3÷10	54	24	2	0,80	CBE-4200
			3÷10	108	36	3	1,20	CBE-5200
			3÷10	115	115	4	1,37	CBE-6200
	electric amplifi ed	electric amplifi ed	2÷10	50	26	1	0,50	CBE-3205
			2,3÷10	54	24	2	0,80	CBE-4205
			2,5÷10	108	36	3	1,20	CBE-5205
			3÷10	115	115	4	1,37	CBE-6205
SPOOL SYSTEM								
	electric amplifi ed	electric amplifi ed	1÷10	17	17	1	0,55	CBE-3720
			1÷10	18	18	2	0,80	CBE-4720
			1÷10	26	26	3	1,20	CBE-5720
			1÷10	27	27	4	1,37	CBE-6720
	electric amplifi ed	electric non amplifi ed	1,8÷10	17	28	1	0,55	CBE-3730
			1,8÷10	18	25	2	0,80	CBE-4730
			2÷10	26	46	3	1,20	CBE-5730
			2÷10	27	42	4	1,37	CBE-6730
	electric amplifi ed	electric amplifi ed	2,3÷10	17	25	1	0,55	CBE-3900
			2,5÷10	18	27	2	0,80	CBE-4900
			2,5÷10	26	50	3	1,20	CBE-5900
			2,5÷10	30	47	4	1,37	CBE-6900
	electric amplifi ed	electric amplifi ed	2,3÷10	17	25	1	0,55	CBE-3940
			2,5÷10	18	27	2	0,80	CBE-4940
			2,5÷10	26	50	3	1,20	CBE-5940
			2,5÷10	30	47	4	1,37	CBE-6940

o.c. = open centres c.c. = closed centres p.c. = pressurized centres

For manual version with button, add "U" to the end of the part number

Electrovalves are supplied without coil, connector and locking ring

Pneumatic Valves

CBE12 ISO 5599/1 Valves with M12 male connector



The use of pneumatic component in the automotive field, coupled with electric components, led to the development of a traditional ISO valve with electric connector M12 placed in central position, for both valves with single as well as double electric control.

Single/double electric impulse




	Symbol	Control	Return	Pressure		Times (ms)		Size	Weight	Part no.
				bar		En.	De-en.		Kg	
SINGLE IMPULSE - MIXED SYSTEM										
5/2		electric amplifi ed	pneumomechanical spring	2÷9	18	29	1	0,45	CBE12-3000	
				2,3÷9	23	24	2	0,55	CBE12-4000	
				2,5÷9	35	78	3	0,90	CBE12-5000	
SINGLE IMPULSE - SPOOL SYSTEM										
5/2		electric amplifi ed	pneumomechanical spring	2÷9	19	32	1	0,45	CBE12-3700	
				2,2÷9	23	28	2	0,55	CBE12-4700	
				2,3÷9	36	82	3	0,90	CBE12-5700	
DOUBLE IMPULSE - MIXED SYSTEM										
5/2		electric amplifi ed	electric amplifi ed	1÷9	14	14	1	0,55	CBE12-3020	
				1÷9	16	16	2	0,80	CBE12-4020	
				1÷9	25	25	3	1,20	CBE12-5020	
5/3 p.c.		electric amplifi ed	electric amplifi ed	2÷9	45	23	1	0,50	CBE12-3205	
				2,3÷9	51	23	2	0,80	CBE12-4205	
				2,5÷9	119	40	3	1,20	CBE12-5205	
DOUBLE IMPULSE - SPOOL SYSTEM										
5/2		electric amplifi ed	electric amplifi ed	1÷9	15	15	1	0,55	CBE12-3720	
				1÷9	17	17	2	0,80	CBE12-4720	
				1÷9	29	29	3	1,20	CBE12-5720	
5/3 o.c.		electric amplifi ed	electric amplifi ed	2,3÷9	15	22	1	0,55	CBE12-3900	
				2,5÷9	17	26	2	0,80	CBE12-4900	
				2,5÷9	29	55	3	1,20	CBE12-5900	
5/3 c.c.		electric amplifi ed	electric amplifi ed	2,3÷9	15	22	1	0,55	CBE12-3940	
				2,5÷9	17	26	2	0,80	CBE12-4940	
				2,5÷9	29	55	3	1,20	CBE12-5940	

c.a. = centri aperti c.c. = centri chiusi c.p. = centri in pressione


Valves are supplied with 24 V DC coil

Single electric impulse



	ISO 1	ISO 2	ISO 3
A	128	145	191
B	73	73	90
C	39	52	64
D	5	5	10
E	36	48	64
F	28	38	48
G	18	24	32


Double electric impulse



ELECTRIC FEATURES

Central electric connector M12x1
IP 65 protection degree
24 V DC voltage
2,5 W nominal power
DD-052** series coil (without faston)
ED 100%
LED indicator

Available upon request other voltages
max 48 V DC



2

Standardized valves

Pneumatic Valves


CBF Side connections sub-bases

Climax®

ISO 1 - Single sub-base, side connections



Notes	Connection	Material	Weight Kg	Part no.
in line connections	G1/8	zamak	0,250	CBF-1060
in line connections	G1/4	zamak	0,230	CBF-1061

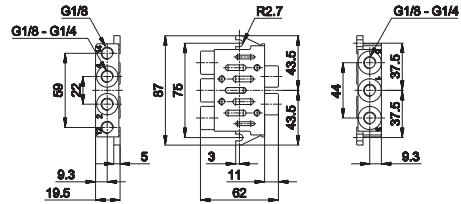


1 = Supply port 3 - 5 = Exhaust
2 - 4 = Use 12 - 14 = Pilots

ISO 2 - Single sub-base, side connections



Notes	Connection	Material	Weight Kg	Part no.
in line connections	G1/4	zamak	0,640	CBF-1150
in line connections	G3/8	zamak	0,650	CBF-1151

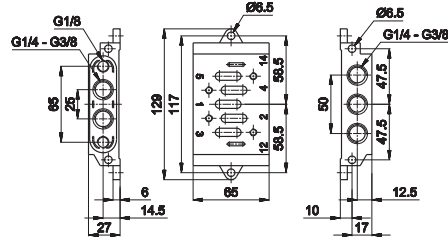


1 = Supply port 3 - 5 = Exhaust
2 - 4 = Use 12 - 14 = Pilots

ISO 3 - Single sub-base, side connections



Notes	Connection	Material	Weight Kg	Part no.
in line connections	G1/2	aluminium	0,740	CBF-3060
in line connections	G3/4	aluminium	0,740	CBF-3061

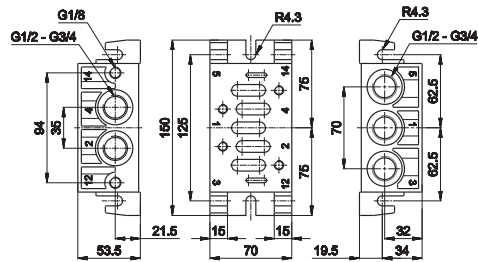


1 = Supply port 3 - 5 = Exhaust
2 - 4 = Use 12 - 14 = Pilots

ISO 4 - Single sub-base, side connections



Notes	Connection	Material	Weight Kg	Part no.
in line connections	G3/4	aluminium	1,280	CBF-4060
dorsal and side connections	G1	aluminium	1,280	CBF-4061

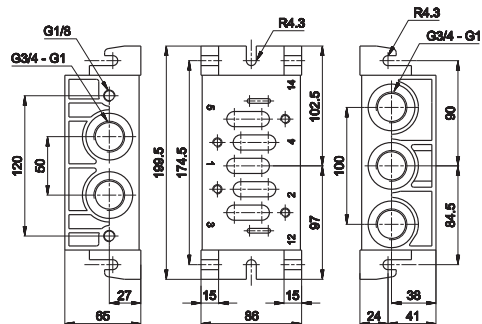


1 = Supply port 3 - 5 = Exhaust
2 - 4 = Use 12 - 14 = Pilots

Pneumatic Valves

CBF Dorsal connections sub-bases

Climax®

ISO 1 - Single modular or Manifold sub-base, dorsal connections, separate exhausts

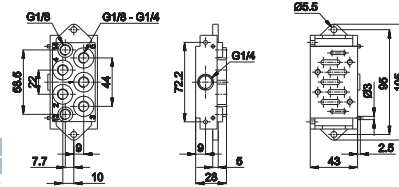


Notes	Connection	Material	Weight Kg	Part no.
dorsal connections	G1/8	zamak	0,350	CBF-1062
dorsal connections	G1/4	zamak	0,330	CBF-1063

Single assembly: close side ports (G1/8 - G1/4)
Manifold assembly with common inlet: close dorsal connections n.1
With incorporated screws and seal

1 = Supply port
2 - 4 = Use
3 - 5 = Exhaust
12 - 14 = Pilots



ISO 2 - Single sub-base, dorsal connections

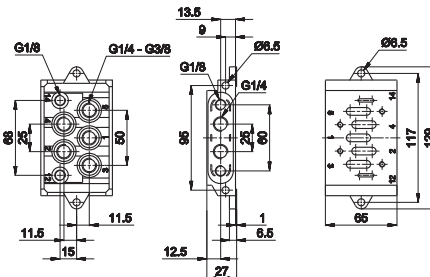

Notes	Connection	Material	Weight Kg	Part no.
dorsal connections	G1/4	zamak	0,640	CBF-1152
dorsal connections	G3/8	zamak	0,650	CBF-1153

1 = Supply port
2 - 4 = Use
3 - 5 = Exhaust
12 - 14 = Pilots


ISO 3 - Single sub-base, dorsal connections

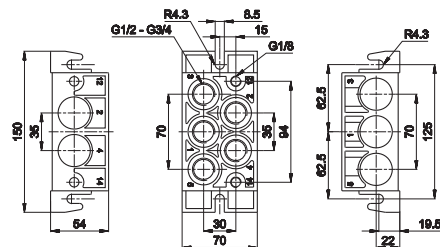

Notes	Connection	Material	Weight Kg	Part no.
dorsal connections	G3/4	aluminium	0,720	CBF-3063

1 = Supply port
2 - 4 = Use
3 - 5 = Exhaust
12 - 14 = Pilots

ISO 4 - Single sub-base, dorsal connections

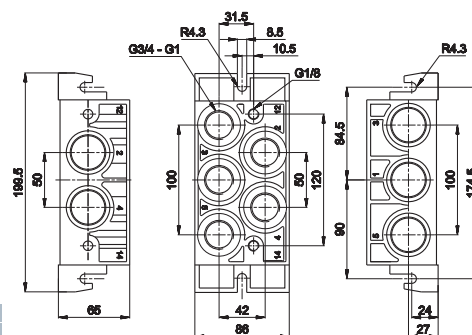

Notes	Connection	Material	Weight Kg	Part no.
dorsal connections	G3/4	aluminium	1,240	CBF-4062
dorsal connections	G1	aluminium	1,240	CBF-4063

1 = Supply port
2 - 4 = Use
3 - 5 = Exhaust
12 - 14 = Pilots

2


Standardized valves

Pneumatic Valves

CBF Manifold sub-bases


Climax[™]

ISO 1 - Manifold universal system sub-base, dorsal and side connections, conveyed exhausts

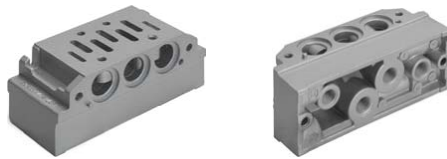

Notes	Connection	Material	Weight	Part no.
			Kg	
dorsal and side connections	G1/8	aluminium	0,280	CBF-1071
dorsal and side connections	G1/4	aluminium	0,275	CBF-1072
side pneumatic impulses	G1/8	aluminium	0,300	CBF-1071S
side pneumatic impulses	G1/4	aluminium	0,295	CBF-1072S

Dorsal and side connections possible. Close unused ports with caps.
With incorporated screws, seals and caps included

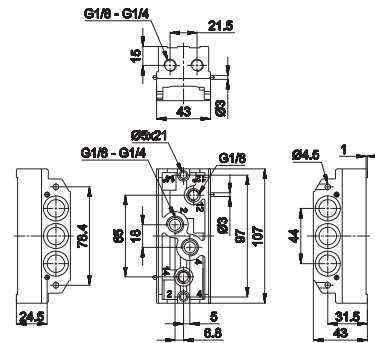

1 = Supply port
2 - 4 = Use
3 - 5 = Exhaust

ISO 1 - Manifold universal system inlet plate



- ☐ A On top connections
- ☐ B In line connections
- ☐ C Dorsal connetions


Notes	Connection	Material	Weight Kg	Part no.
in line connections	G3/8	zamak	0,355	CBF-1064
on top connections	G3/8	zamak	0,355	CBF-1065
dorsal connections	G3/8	zamak	0,355	CBF-1066




- D** Only in line connections

Notes	Connection	Material	Weight	Part no.
			Kg	Part no.
only in line connections	G3/8	aluminium	0,120	CBF-1068

When battery exceeds 4 units, the mounting of 2 plates is recommended
Mixed version available upon request
With incorporated screws and seal

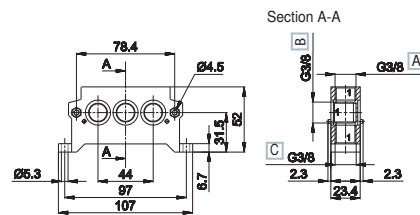

1 = Supply port
3 - 5 = Exhaust

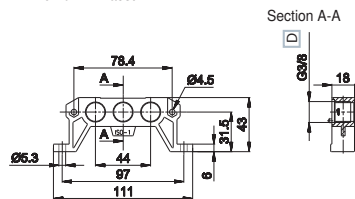


1 = Supply port
3 - 5 = Exhaust

ISO 1 - Manifold universal system diaphragm




Notes	Connection	Material	Weight	Part no.
-	-	zamak	Kg 0,090	Part no. CBF-1070

The diaphragm is not only the end plate of the manifold but it is also coupled with the exhaust regulator to separate two sub-bases and regulate the valves independently. In this case break the central blind hole.
To get two or more pressures, break the two side blind holes.

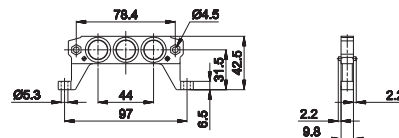

BF-1085

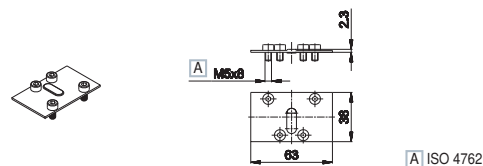

ISO 1 - Closing plate for sub-base 1
material: steel
weight: 0,030 Kg (for all sub-base versions)

Pneumatic Valves

CBF Manifold sub-bases


Climax®
Pneumatics

ISO 2 - Manifold universal system sub-base, dorsal and side connections, conveyed exhausts



Notes	Connection	Material	Weight Kg	Part no.
dorsal and side connections	G1/4	zamak	0,800	CBF-1160
dorsal and side connections	G3/8	zamak	0,800	CBF-1161

Dorsal and side connections possible. Close unused ports with caps.
With incorporated screw, seals and caps included

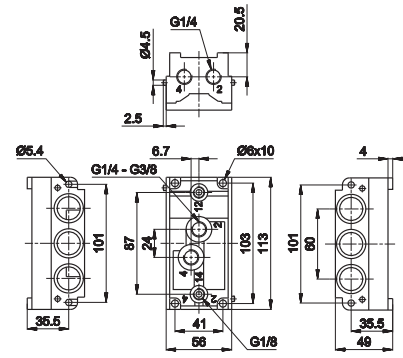


1 = Supply port 3 - 5 = Exhaust
2 - 4 = Use 12 - 14 = Pilots

ISO 2 - Manifold Universal system inlet plate



Notes	Connection	Material	Weight Kg	Part no.
in line connections	G1/2	zamak	0,460	CBF-1154
dorsal connections	G1/2	zamak	0,460	CBF-1155

When battery exceeds 4 units, the mounting of 2 plates is recommended
Mixed version available upon request
With incorporated screw and seals

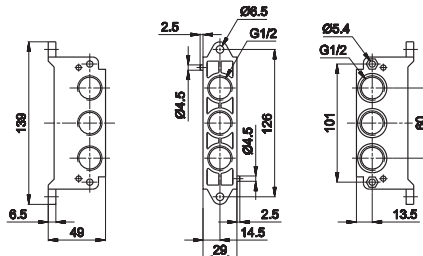


ISO 2 - Manifold universal system diaphragm



Notes	Connection	Material	Weight Kg	Part no.
-	-	zamak	0,160	CBF-1162


The diaphragm is not only the end plate of the manifold but it is also coupled with the exhaust regulator to separate two sub-bases and regulate the valves independently. In this case break the central blind hole.
To get two or more pressures, break the two side blind holes.

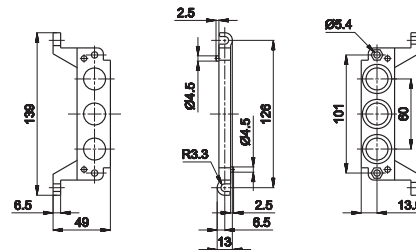

2

Standardized valves

BF-1175

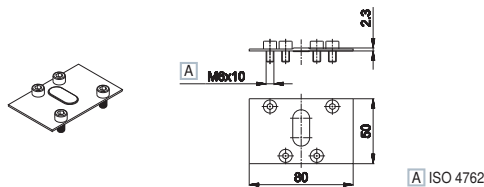

ISO 2 - Closing plate for sub-base 2
material: steel
weight: 0,050 Kg (for all sub-base versions)

Pneumatic Valves

CBF **Manifold sub-bases**


Climax™
Pneumatics

ISO 3 - Manifold universal system sub-base, dorsal and side connections, conveyed exhausts



Notes	Connection	Material	Weight	Part no.
			Kg	Part no.
dorsal and side connections	G1/2	aluminium	1,100	CBF-3071
dorsal and side connections	G3/4	aluminium	1,100	CBF-3072

Dorsal and side connections possible. Close unused ports with caps.
With incorporated screws, seals and caps included

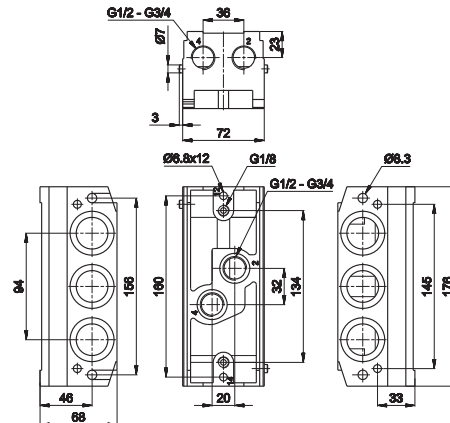


1 = Supply port
2 - 4 = Use
3 - 5 = Exhaust
12 - 14 = Pilots

ISO 3 - Manifold Universal system inlet plate




Notes	Connection	Material	Weight Kg	Part no.
in line connections	G1	aluminium	0,440	CBF-3064

When battery exceeds 4 units, the mounting of 2 plates is recommended
Mixed version available upon request
With incorporated screws and seals

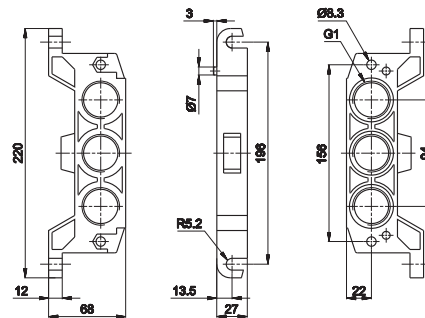

CBF-3175

CBF-3082

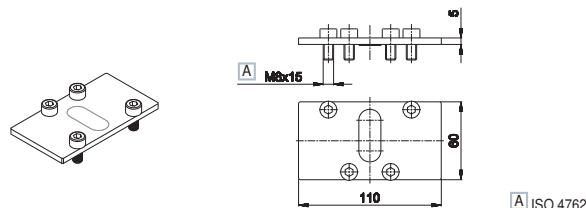

ISO 3 - Closing plate for sub-base 3
material: steel
weight: 0,080 Kg (for all sub-base versions)





ISO 3 - Universal system Cap
material: steel
weight: 0,020 Kg
To be used to reach two pressures

Pneumatic Valves

CBF Accessories

Climax®
Pneumatics

CBF-1190

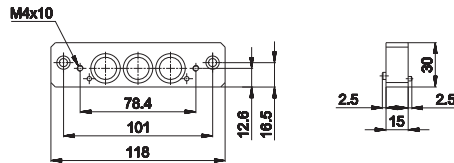



ISO - Connecting interface for universal sub-bases size 1 and 2

material: steel

weight: 0,110 Kg

It allows the use of size 1 and 2 valves in one manifold with conveyed pressure and exhausts. (Upon request: pressure and/or exhausts separated)

CBF-3190

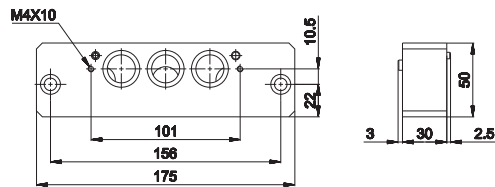



ISO - Connecting interface for universal sub-bases size 2 and 3

material: steel

weight: 0,570 Kg

It allows the use of size 2 and 3 valves in one manifold with conveyed pressure and exhausts. (Upon request: pressure and/or exhausts separated)

CBF-3191

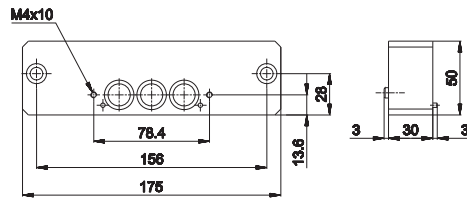

ISO - Connecting interface for universal sub-bases size 1 and 3

material: steel

weight: 0,570 Kg

It allows the use of size 1 and 3 valves in one manifold with conveyed pressure and exhausts. (Upon request: pressure and/or exhausts separated)

2

Standardized valves

